

KEGELLANDMARK PATTERNS

SPORT SERIES



This page shows the **KOSI FLEX LANE MACHINE** program sheet.

The **HEADER** shows the oil pattern distance, the reverse brush drop distance, the amount of lane conditioner applied to the lane, the oil per board setting, and the conditioner type in each tank.

Below that is the **FLEX LANE MACHINE PROGRAM** settings which shows the load structure and number of loads, the oil pump setting if using the multi mic stream feature, the speed of the lane machine, the buffer speed, and the tank choice per load screen.

The **OVERHEAD CHART** on the far right shows where the conditioner is applied on both the forward and reverse pass. The gradient area is a calculation of how the conditioner might bleed off the buffer brush.

The **COMPOSITE GRAPH** at the bottom shows the total amount of conditioner applied to every board along with that volume ratio in different zones.

A good way to think about the composite graph is to envision all the conditioner on the lane being pushed back to the foul line. Once all the conditioner is stacked up, this is what it would look like.

גביע המדינה לסניורים 2018 באולינג ארבל הרצליה

FLEX

S - Sphinx




Oil Pattern Distance	40	Reverse Brush Drop	35	Oil Per Board	50 ul
Forward Oil Total	15.8 mL	Reverse Oil Total	9.4 mL	Volume Oil Total	25.2 mL
Tank Configuration	N/A	Tank A Conditioner	FIRE	Tank B Conditioner	ICE

2L	2R	7								
		,	14	3	В	259	0.0	11.9	11.9	12950
IOL	10R	1	14	3	В	21	11.9	13.8	1.9	1050
I1L	11R	1	18	3	В	19	13.8	16.3	2.5	950
I2L	12R	1	18	3	В	17	16.3	18.8	2.5	850
2L	2R	0	18	3	В	0	18.8	30.0	11.2	0
2L	2R	0	30	3	В	0	30.0	40.0	10.0	0
	1L 2L L	1L 11R 2L 12R L 2R	1L 11R 1 2L 12R 1 L 2R 0	1L 11R 1 18 2L 12R 1 18 L 2R 0 18	1L 11R 1 18 3 2L 12R 1 18 3 L 2R 0 18 3	1L 11R 1 18 3 B 2L 12R 1 18 3 B L 2R 0 18 3 B	1L 11R 1 18 3 B 19 2L 12R 1 18 3 B 17 L 2R 0 18 3 B 0	1L 11R 1 18 3 B 19 13.8 2L 12R 1 18 3 B 17 16.3 L 2R 0 18 3 B 0 18.8	1L 11R 1 18 3 B 19 13.8 16.3 2L 12R 1 18 3 B 17 16.3 18.8 L 2R 0 18 3 B 0 18.8 30.0	1L 11R 1 18 3 B 19 13.8 16.3 2.5 2L 12R 1 18 3 B 17 16.3 18.8 2.5 1L 2R 0 18 3 B 0 18.8 30.0 11.2

START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
2L	2R	0	30	3	В	0	40.0	31.0	-9.0	0
12L	12R	2	22	3	В	34	31.0	24.8	-6.2	1700
11L	11R	2	22	3	В	38	24.8	18.6	-6.2	1900
10L	10R	2	22	3	В	42	18.6	12.4	-6.2	2100
2L	2R	2	14	3	В	74	12.4	8.5	-3.9	3700
2L	2R	0	14	3	В	0	8.5	0.0	-8.5	0

Cleaner Ratio Main Mix 4:1
Cleaner Ratio Back End Mix 4:1
Cleaner Ratio Back End Distance 59
Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 60

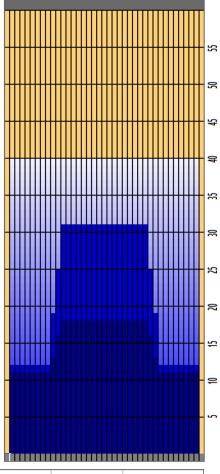

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Mlddle: Inside Track	Middle:Middle Track	Middle:Outside Track
rack Zone Ratio	2	1.43	1	1	1.43	2
1500 1350 1200 1050 900 750 600 450 150	3 4 5 6 7 8 9	10 11 12 13 14 15	16 17 18 19 20 19	18 17 16 15 14 13 12	11 10 9 8 7 6	5 4 3 2 1

KEGEL TIP - Once the amount of conditioner on the corners (outsides) reaches 300 microliters, an oil pattern begins to become "competitive". Less than that amount the ball might see friction and it could play on the easy side.